



**KEY FEATURES**

- Available with 50° (narrow) or 100° (wide) symmetric optics
- Adjustable mounting bracket
- Hazardous location approved
- Thermally managed for maximum longevity
- Robust construction suitable for outdoor applications
- Operational and environmental benefits of LED technology



TECHNICAL SPECIFICATIONS / MAXIMUM RATINGS	
HOUSING	Aluminum
MOUNTING	Aluminum Yoke
VOLTAGE MAXIMUM	28 VDC
TYPICAL INPUT VOLTAGE	12-24 VDC
POWER	7.9 W @ 12 VDC   8.4 W @ 24 VDC
CURRENT	660 mA @12 VDC , Or 350 mA @ 24 VDC
CONNECTIONS	6Ft Flying Lead   White: + Black: -
TEMPERATURE RANGE	-40°C – +85°C
TYPICAL CASE TEMPERATURE	~15°C Above Ambient Temperature
CERTIFICATIONS	Certified to CSA 22.2 No. 250.0 , Conforms To UL 1598 Standard, Class 1 Division 2 Groups ABCD , T3
INGRESS PROTECTION	IP66
COLOR TEMP RANGE	CW: 6500K   WW: 3500K
CRI VALUE	CW: 75   WW: 80
TOTAL LUMENS	416
TOTAL SCOTOPIC LUMEN	890
WEIGHT	2.5 LB / 1.13 KG

MODEL	COLOR	OPTIC	FINISH
CANLED-DC			
Contact for C1D2 Information	<b>CW</b> -Cool White <b>WW</b> -Warm White <i>Contact for custom color</i>	<b>N</b> -Narrow <b>W</b> -Wide <b>NF</b> -Narrow Frosted <b>WF</b> -Wide Frosted	<b>ALU</b> - Aluminum <i>Contact for custom color</i> - Anodizing - Powder coating

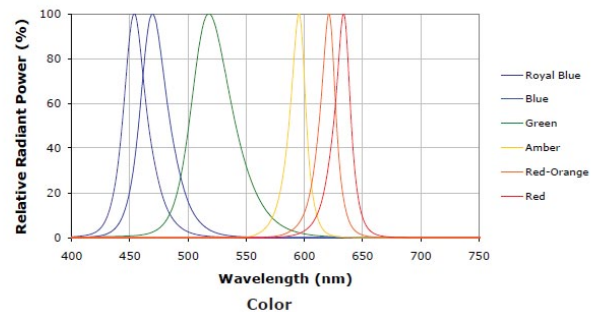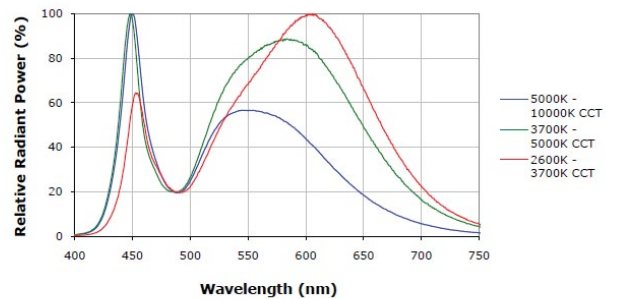

**PHOTOMETRICS**

