




**KEY FEATURES**

- Available in 30°(narrow) or 100°(wide) symmetric optics
- Hazardous location approved
- Thermally managed for maximum longevity
- Robust construction suitable for outdoor applications
- Lifespan up to 100 000 hours
- 12-24 VDC Input Voltage
- Ideal for solar powered applications

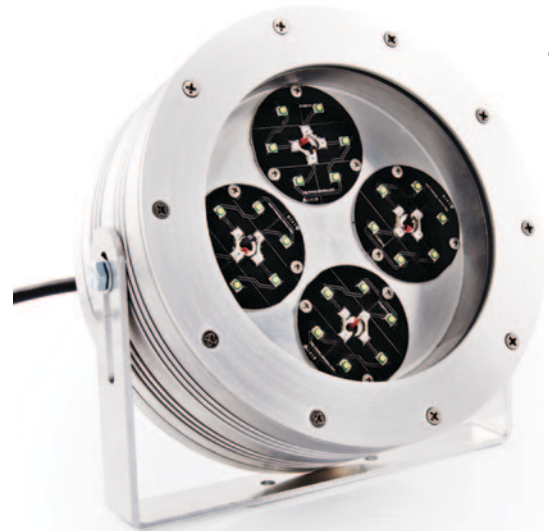

**MODEL NUMBER SELECTOR**


Example: XCANLEDDC-CW-W-ALU-C1D2

MODEL	COLOR	OPTIC	FINISH	LOCATION
XCANLEDDC				<b>C1D2</b>
	<b>CW</b> - Cool White <b>NW</b> - Neutral White <b>WW</b> - Warm White <b>CUS</b> -Custom <i>Contact for custom color</i>	<b>N</b> -Narrow <b>W</b> -Wide <b>NF</b> -NarrowFrosted <b>WF</b> -Wide Frosted	<b>ALU</b> -Aluminium <b>CUS</b> -Custom <i>See pg2 for custom finishes</i>	<b>C1D2</b> - Class 1, Div 2 <i>GEN Available for General Locations See XCANLEDDC-GEN</i>





**TECHNICAL SPECIFICATIONS / MAXIMUM RATINGS**

HOUSING	Aluminum
MOUNTING	1/4" - 20 Mounting Screws Aluminum 1" Mounting Yoke
VOLTAGE MAXIMUM	28 VDC
TYPICAL INPUT VOLTAGE	24 VDC
POWER	31.6 W @ 12 VDC   33.6 W @ 24 VDC
CURRENT	2.64 A @12 VDC , Or 1.4 A @ 24 VDC
CONNECTIONS	6Ft Flying Lead   White: + Black: -
TEMPERATURE RANGE	-40°C – +85°C
TYPICAL CASE TEMPERATURE	~20°C Above Ambient Temperature
CERTIFICATIONS	Certified To CSA 22.2 No. 250.0 , Conforms To UL 1598 Standard, Class 1 Division 2 Groups ABCD , T3
INGRESS PROTECTION	IP66
COLOR TEMP RANGE	CW: 6500K   NW: 4300K   WW: 3500K
CRI VALUE	CW: 75   NW: 75   WW: 80
TOTAL LUMENS	3097
TOTAL SCOTOPIC LUMEN	6628
WEIGHT	4.5lb   2.05 kg

**DIMENSIONS**

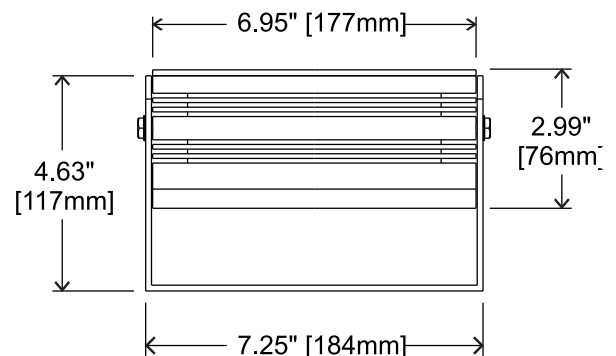


PHOTOMETRICS

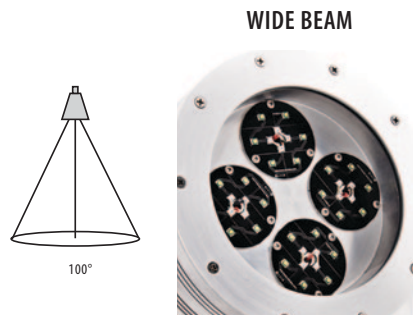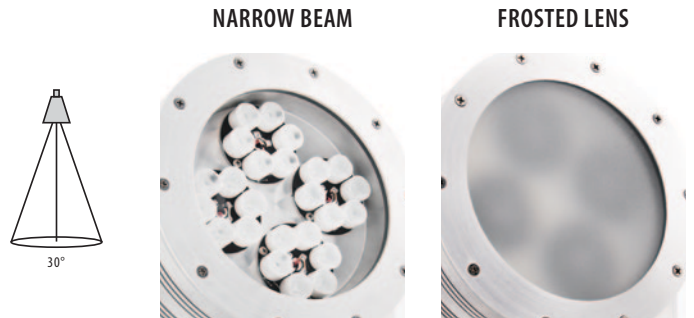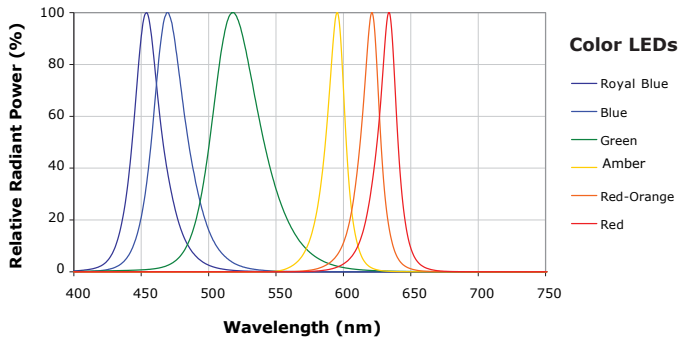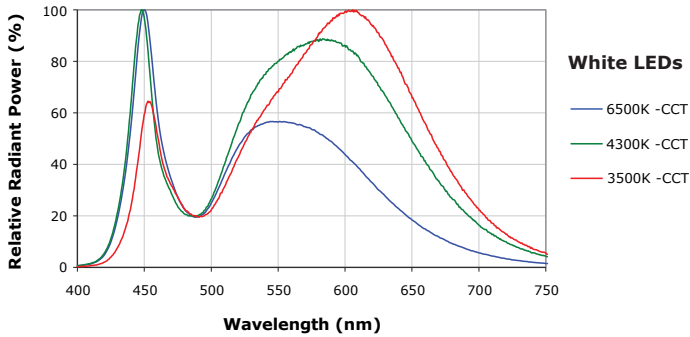

MOUNTING OPTIONS


MOUNTING BRACKET

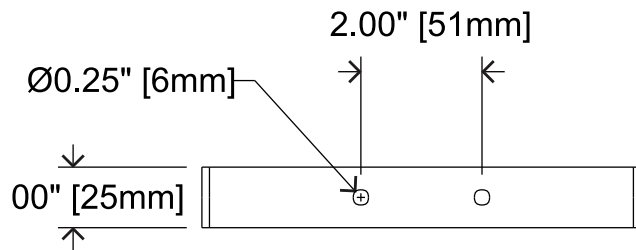

CUSTOM OPTIONS

CUSTOM FINISHES

Anodized Aluminum

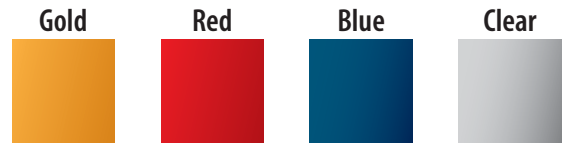

Please contact for further options

Powder Coated Aluminum



Please contact for further options